

STUDENT HOUSING AT CAMPUS MONTILIVI IN GIRONA

GENERAL INFORMATION

Location: C. Estudi General de Girona, s/n
Concession land: Universitat de Girona
Operator: UTE Constructora d'Aro and CompactHabit
General Contractor: Constructora d'Aro
Architect: Xavier Tragant (Aire Arquitectura)


Number of Modules: 96 Units
Traditional System: 0 m²
eMii System: 4.955,45 m²
Total Built Area: 4.955,45 m²

THE PROJECT

70 student dormitory units. 38 of the units are single occupancy, 30 are double occupancy and 2 are used for common area activities. The assembly is formed from two linear blocks, one building is 4 stories while the other is 3.

The industrialized building modules from Compact Habit solve both the purely residential program and the different spaces for community use (fitness room and common area).

The building has received the highest Spanish energy rating - Certificate "A". And the production of hot water and heating is provided by a centralized system utilizing micro-boiler

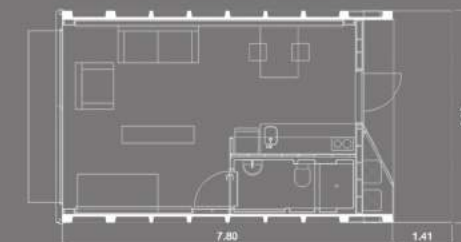

BUILDING STATUS

Project: June 2010
Work: 8 months
Manufacturing: 14 weeks
Erection of Modules: 12 days

